


Roper Pumps

3600

Series

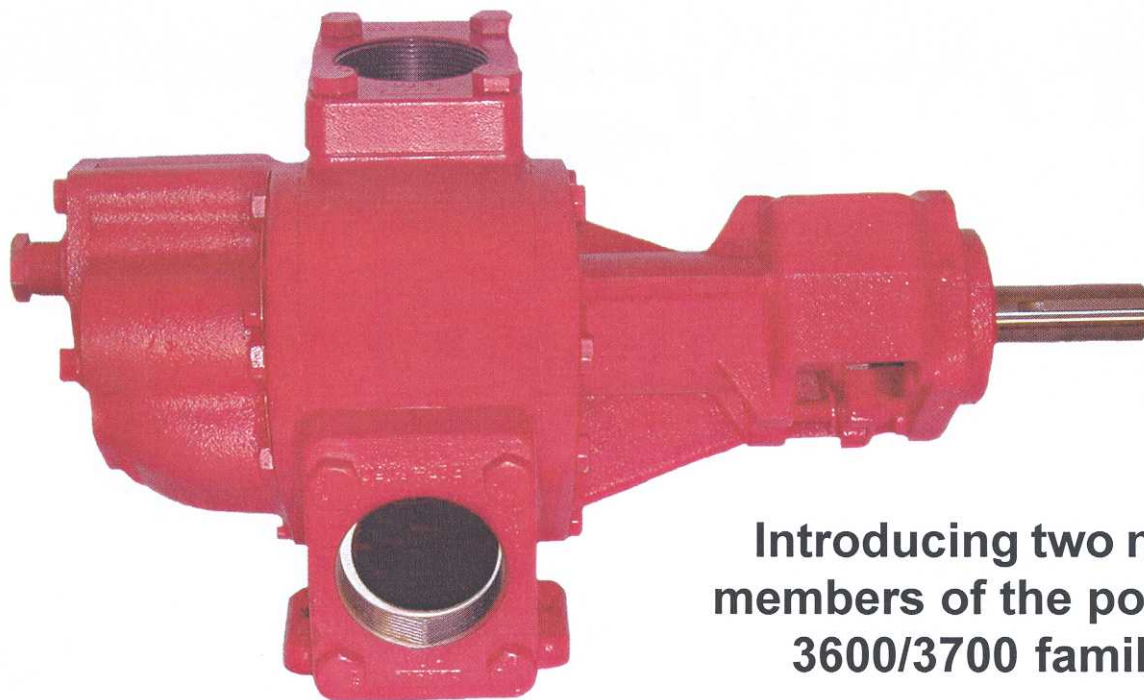

Introducing two new members of the popular 3600/3700 family.

The 3632 and 3643, together with the existing 3648, now provide 3 choices of angled pump with flow rates from 32 to 52 gallons/100 rpm.



The leading force behind liquids.

### Features

A wider viscosity capacity for both thick and thin liquids provide a versatile alternative to vane pumps, while common interchangeable parts keep inventory to a minimum.

- Heavy duty cast iron helical gear pumps
- Bi-directional, self-priming
- Differential pressures to 125 psi
- Up to 468 gpm
- Standard operation up to 212°F
- Maintenance-free durability

### Options

- Hydraulic motor drives
- Can be built to operate up to 450°F
- Internal relief valve and integral gear reducer
- Outboard bearing, depending on drive and seal arrangements
- Delrin® Idler Gears for the 48 model

Delrin® is a registered trademark of E.I. duPont de Nemours Co. (Inc.)

