





9X201 Performance Curves

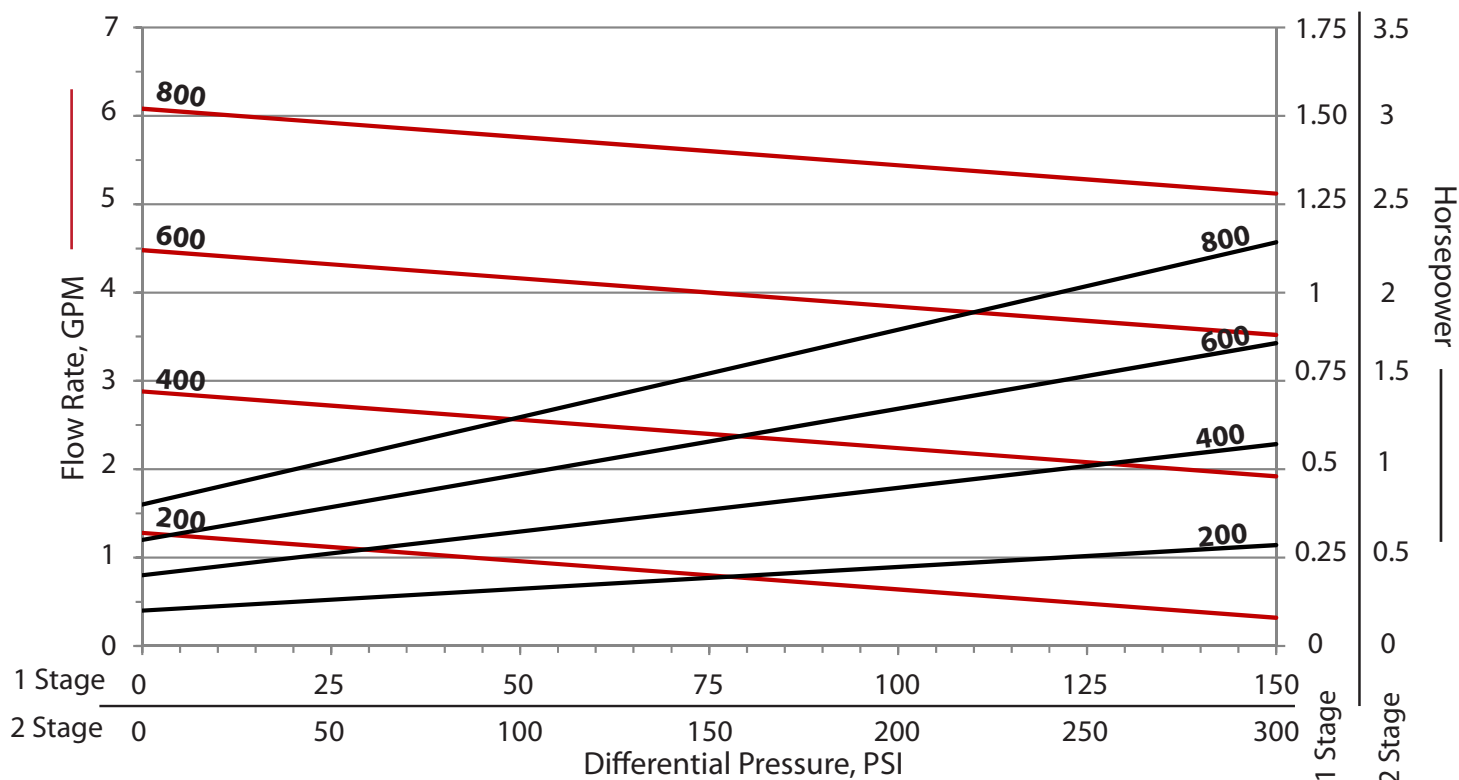

Net Positive Suction Head

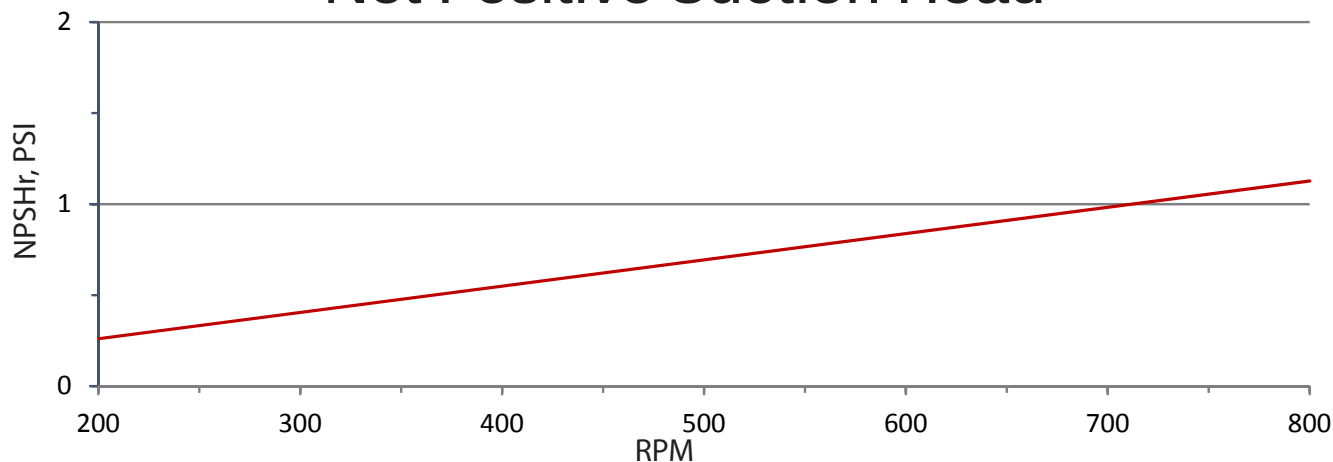

Apparent Viscosity

Torque additive (Ft/Lb) and* Maximum Speed

$$\text{HP Viscosity Adder} = (\text{TQ RPM}) / 5252$$

	cPs	1000	2500	5000	10,000	50,000	100,000	150,000	200,000
1 Stage	Torque	1	1.5	2	2.8	5.8	8	9.6	10.9
2 Stage	Torque	2	3	4	5.5	11.6	16	19.3	21.8
	RPM	800	800	500	320	80	40	30	25

Curves are based on 70° F ISO 320 at 720 cPs