
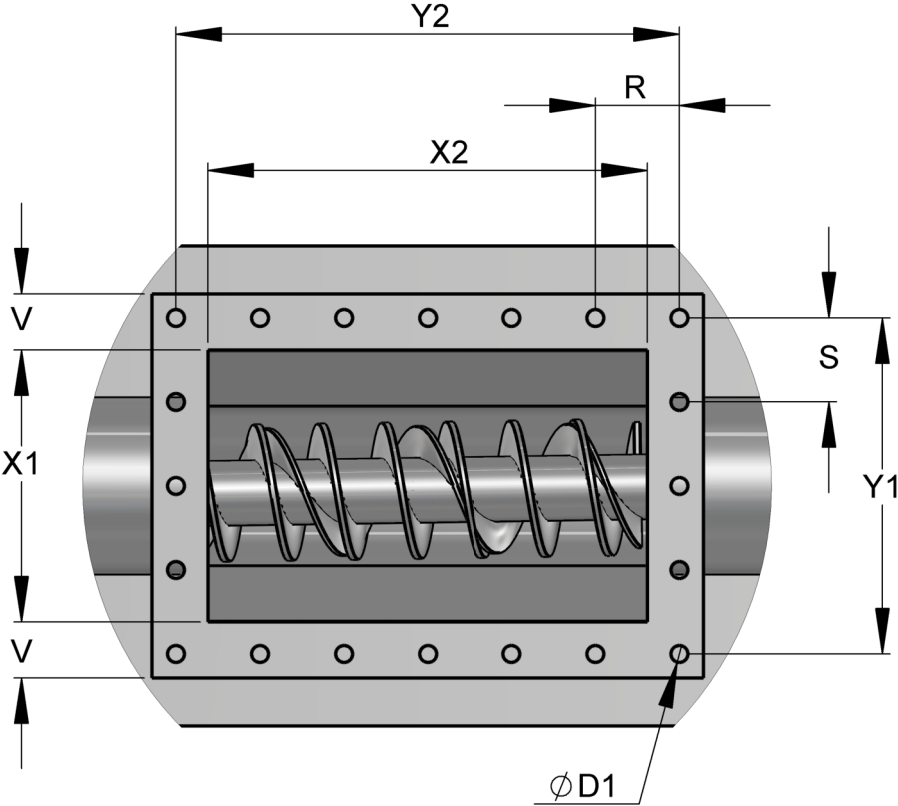


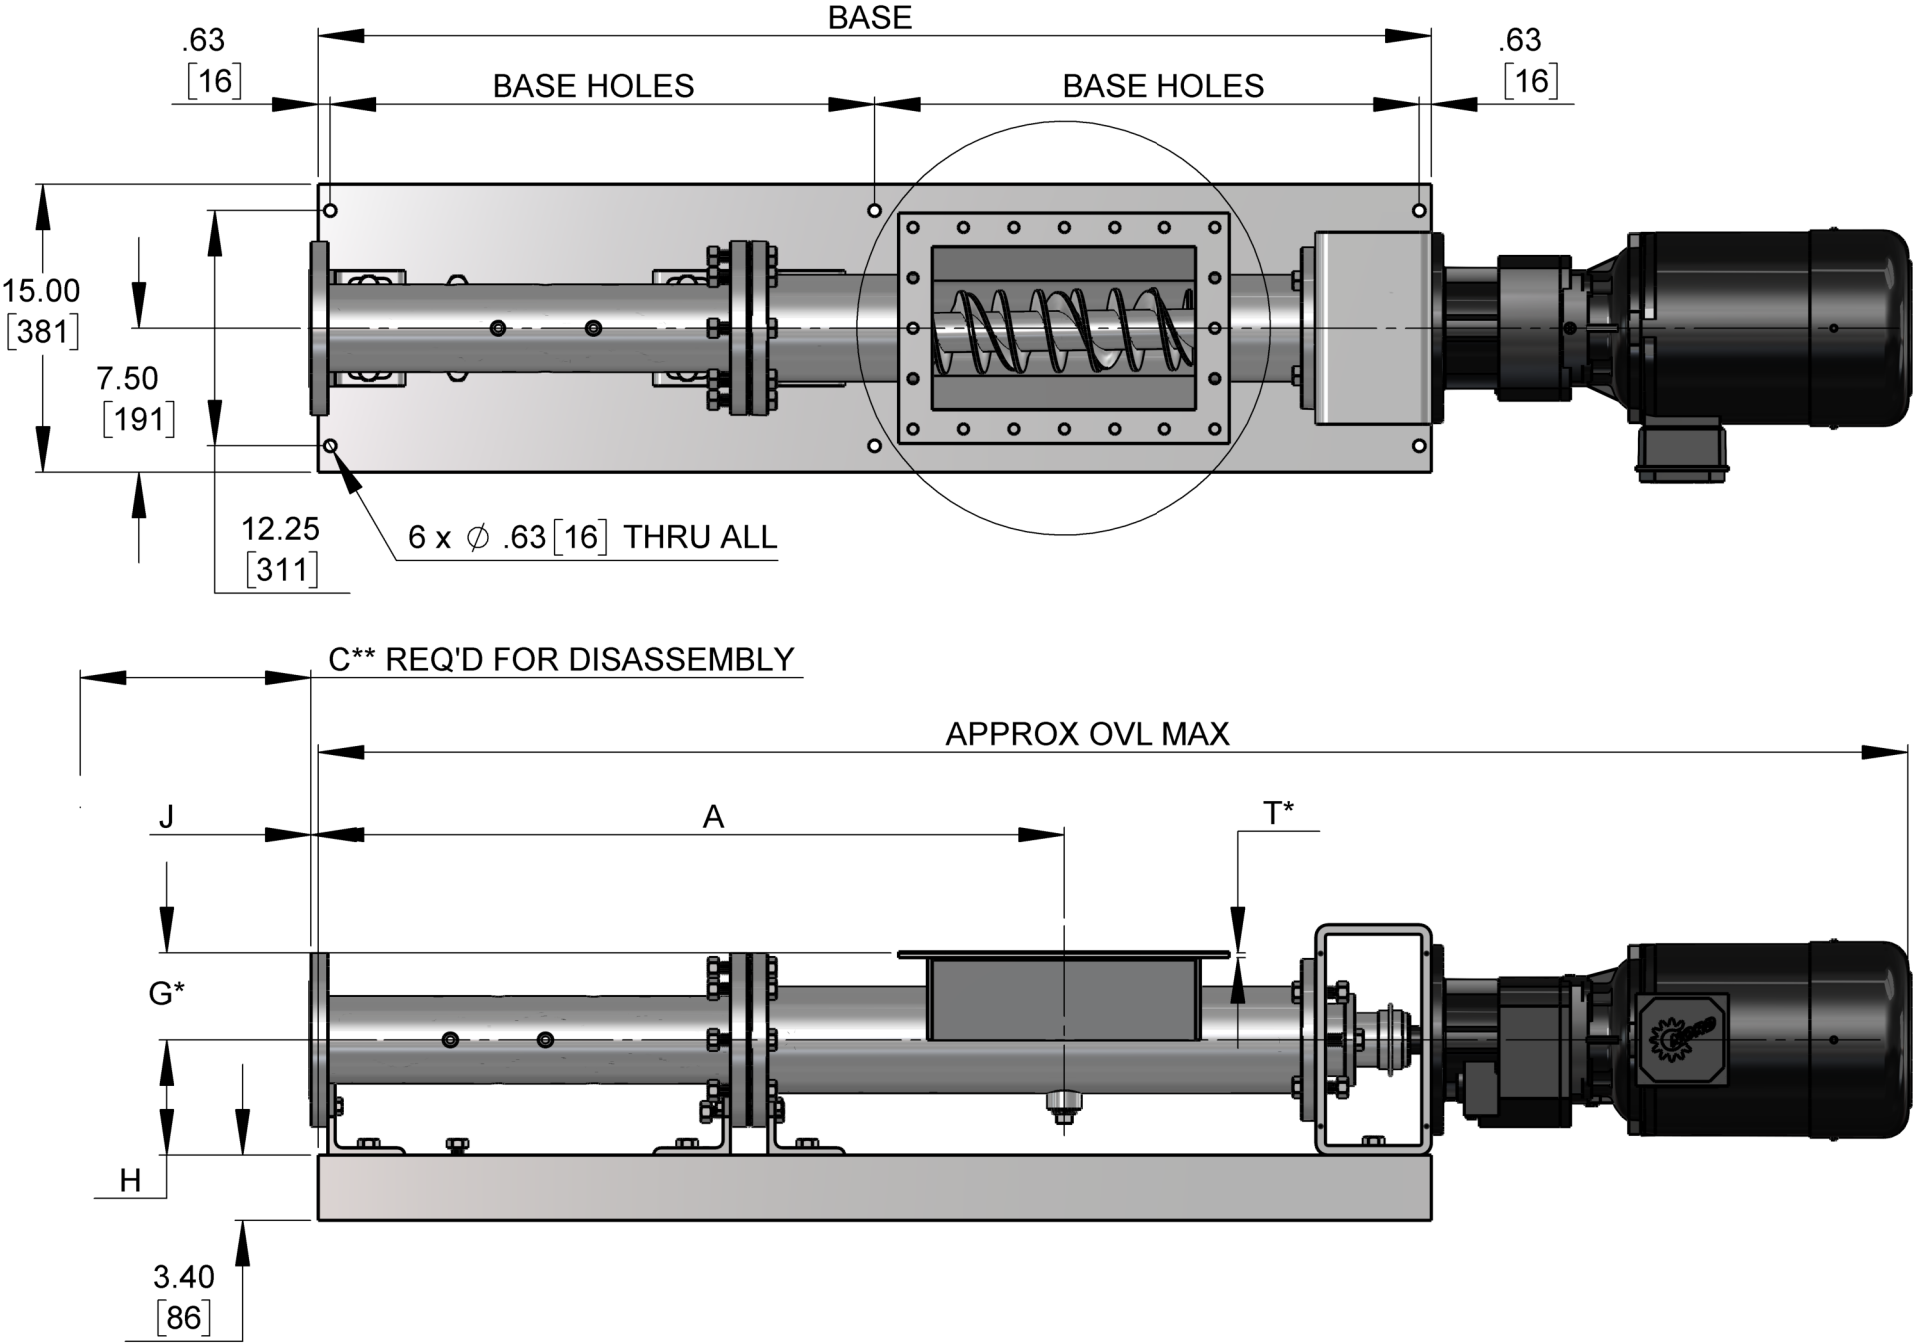

*INCLUDES HOPPER GASKET

PUMP															DP (STD)	GEARMOTOR		BASE	BASE HOLES	OVL (MAX)
	A	C**	D1	G*	H	J	R	S	T*	V	X1	X2	Y1	Y2	(150LB ANSI RF)	FLANGE OD	SHAFT OD			
92813	39.25	25.00	0.55	4.59	6.00	0.38	2.63	2.63	0.31	1.75	8.50	13.75	10.50	15.75	4"	9.84	1.375	58.00	28.38	84.02
	997	635	14	117	152	10	67	67	8	44	216	349	267	400		250	34.9	1473	721	2134
92824	48.07	26.25	0.55	5.90	6.00	0.76	3.88	3.00	0.31	1.75	10.00	17.50	12.00	19.38	4"	9.84	1.625	68.38	33.56	96.90
	1221	667	14	150	152	19	98	76	8	44	254	445	305	492		250	41.3	1737	852	2461
92849	57.86	26.25	0.55	6.75	8.00	-3.44	4.50	3.56	0.31	2.00	12.13	20.13	14.25	22.50	6"	9.84	2.125	87.00	42.88	113.98
	1470	667	14	171	203	-87	114	90	8	51	308	511	362	572		250	54.0	2210	1089	2895

INCHES
MILLIMETER

PROPRIETARY NOTICE: THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH IS THE EXCLUSIVE PROPERTY OF ROPER PUMP COMPANY, COMMERCE, GEORGIA AND SHALL NOT BE COMMUNICATED, DISCLOSED, OR REPRODUCED WITHOUT WRITTEN CONSENT OF MANAGEMENT AND SHALL NOT BE DISCLOSED IN ANY MANNER TO OUTSIDE PARTIES WITHOUT PRIOR WRITTEN CONSENT OF MANAGEMENT.


CERTIFIED DIMENSIONALLY CORRECT FOR:

CUSTOMER
CUSTOMER P.O.
BY

ROPER S.O.
DATE

DO NOT SCALE
DIMS IN INCHES [MM]

PROJECTION



COMMERCE, GA
U.S.A.

FIGURE
928xx

SPEC

TYPE

2