


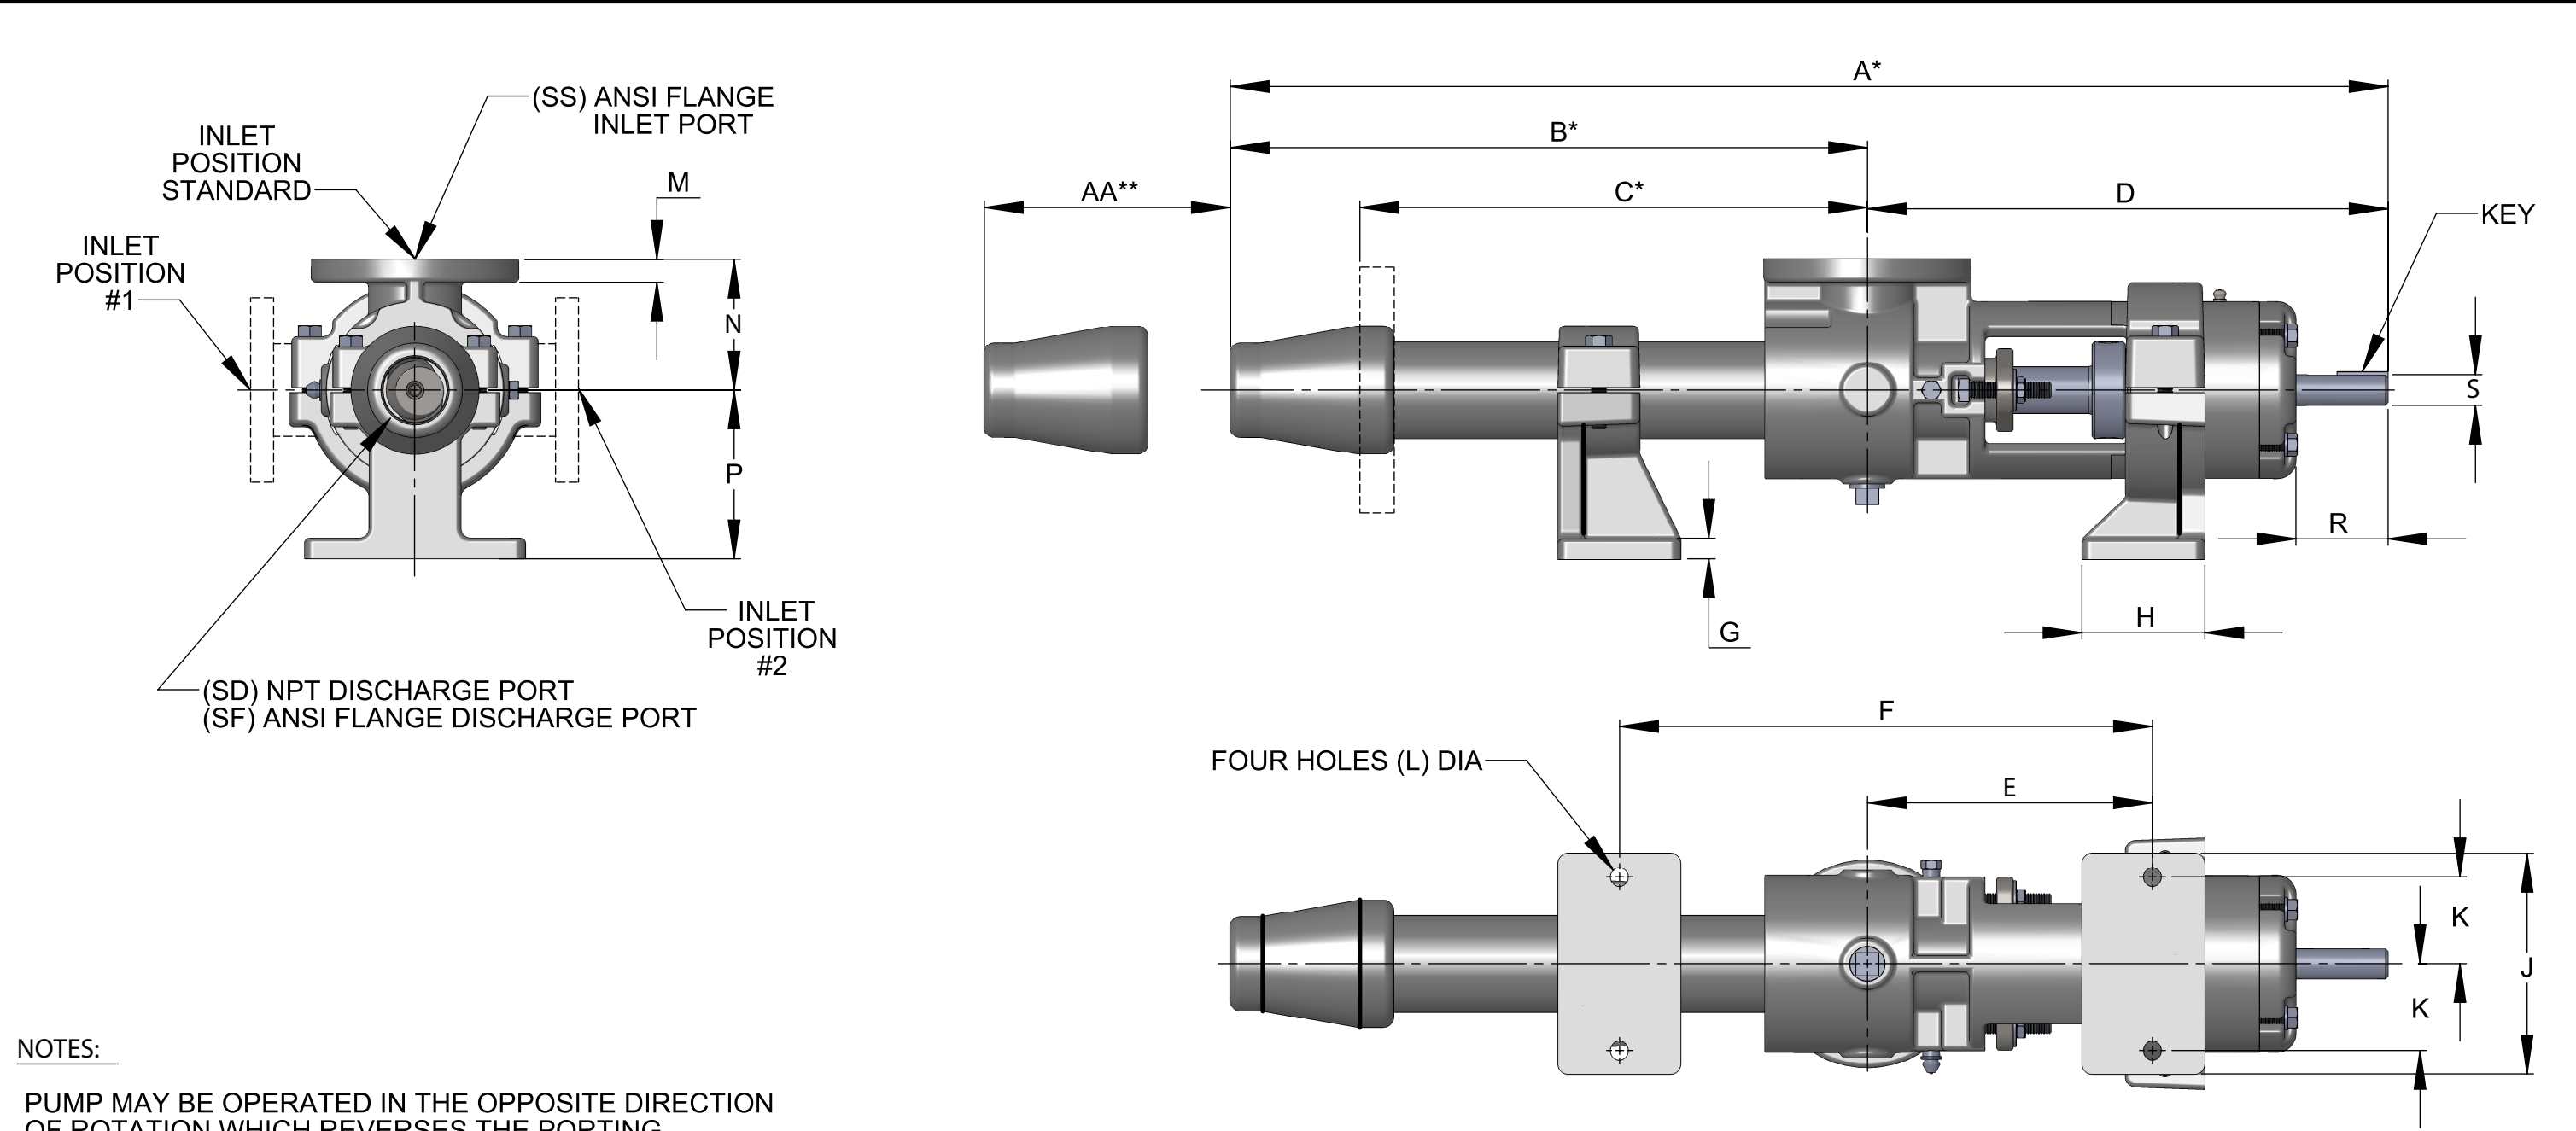

NOTES:

PUMP MAY BE OPERATED IN THE OPPOSITE DIRECTION OF ROTATION WHICH REVERSES THE PORTING.

* TOLERANCE ± 0.38 [10]

** MINIMUM DIMENSION NEEDED TO DISASSEMBLE.

PUMP SIZE	BASIC DIMS.															SHAFT EXTN.			PORT DIMS		
	A*	B*	C*	D	E	F	G	H	J	K	L	M	N	P	AA**	R	S	KEY	SS	SD	SF
91201	22.94 [583]	10.25 [260]	7.25 [184]	12.69 [322]	6.94 [176]	11.50 [292]	0.50 [13]	3.00 [76]	5.38 [136]	2.12 [54]	0.44 [11]	0.56 [14]	3.19 [81]	4.12 [105]	8.38 [213]	2.12 [54]	0.75 [19]	0.19 X 1.25 [5 X 32]	ANSI 1.50" X 150LB	1.25" NPT	ANSI 2.00" X 150LB
92201	28.25 [718]	15.56 [395]	12.56 [319]			13.00 [330]															



PROPRIETARY NOTICE: THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH IS THE EXCLUSIVE PROPERTY OF ROPER PUMP COMPANY, COMMERCE, GEORGIA AND SHALL NOT BE COMMUNICATED, DISCLOSED, OR REPRODUCED WITHOUT WRITTEN CONSENT OF MANAGEMENT AND SHALL NOT BE DISCLOSED IN ANY MANNER TO OUTSIDE PARTIES WITHOUT PRIOR WRITTEN CONSENT OF MANAGEMENT.

CERTIFIED DIMENSIONALLY CORRECT FOR:

CUSTOMER
CUSTOMER P.O.
BY

ROPER S.O.
DATE

DO NOT SCALE
DIMS IN INCHES [MM]

PROJECTION



FIGURE

9X201

SPEC

TYPE

1