





9X205 Performance Curves

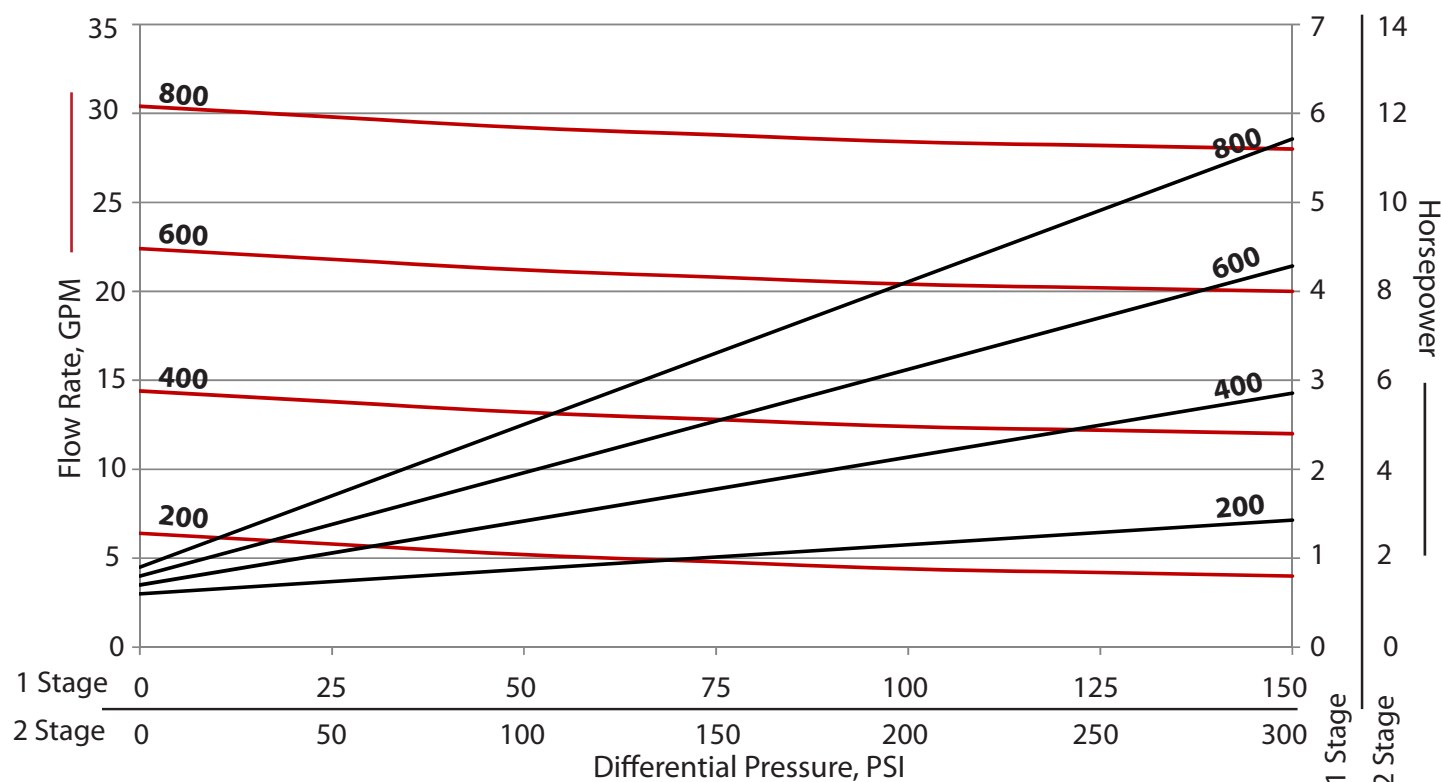

Net Positive Suction Head

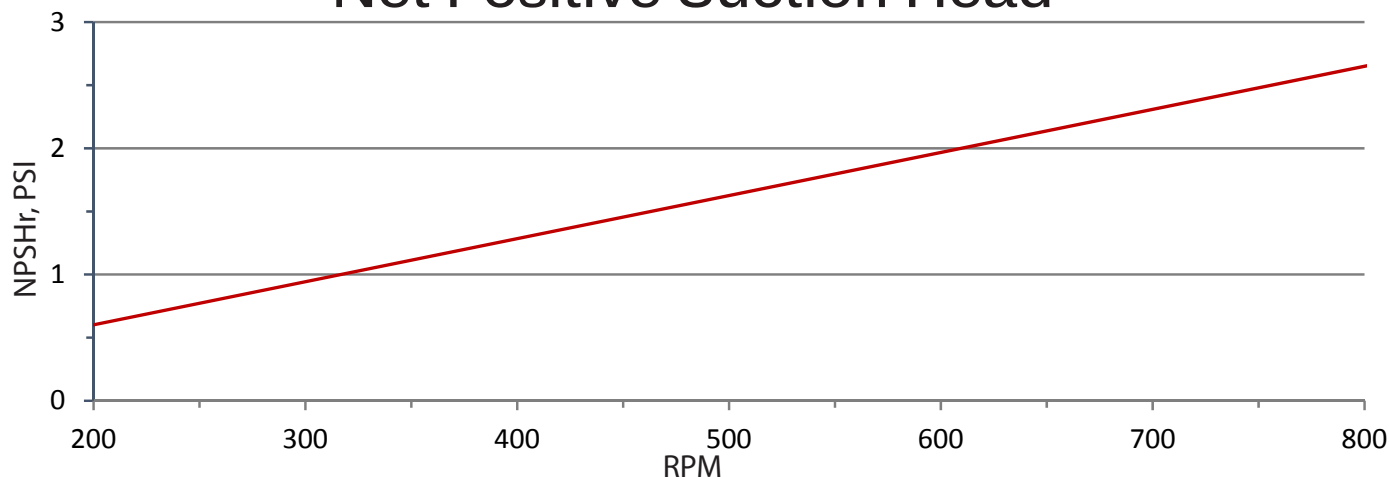

Apparent Viscosity

Torque additive (Ft/Lb) and Maximum Speed

$$\text{HP Viscosity Adder} = (\text{TQ RPM}) / 5252$$

	cPs	1000	2500	5000	10,000	50,000	100,000	150,000	200,000
1 Stage	Torque	5.6	8.7	11.8	16.3	34.2	47.3	56.8	65.0
2 Stage	Torque	11.2	17.3	23.7	32.5	68.3	94.7	113.7	130.0
	RPM	800	800	500	320	80	40	30	25

Curves are based on 70° F ISO 320 at 720 cPs