





9X202 Performance Curves

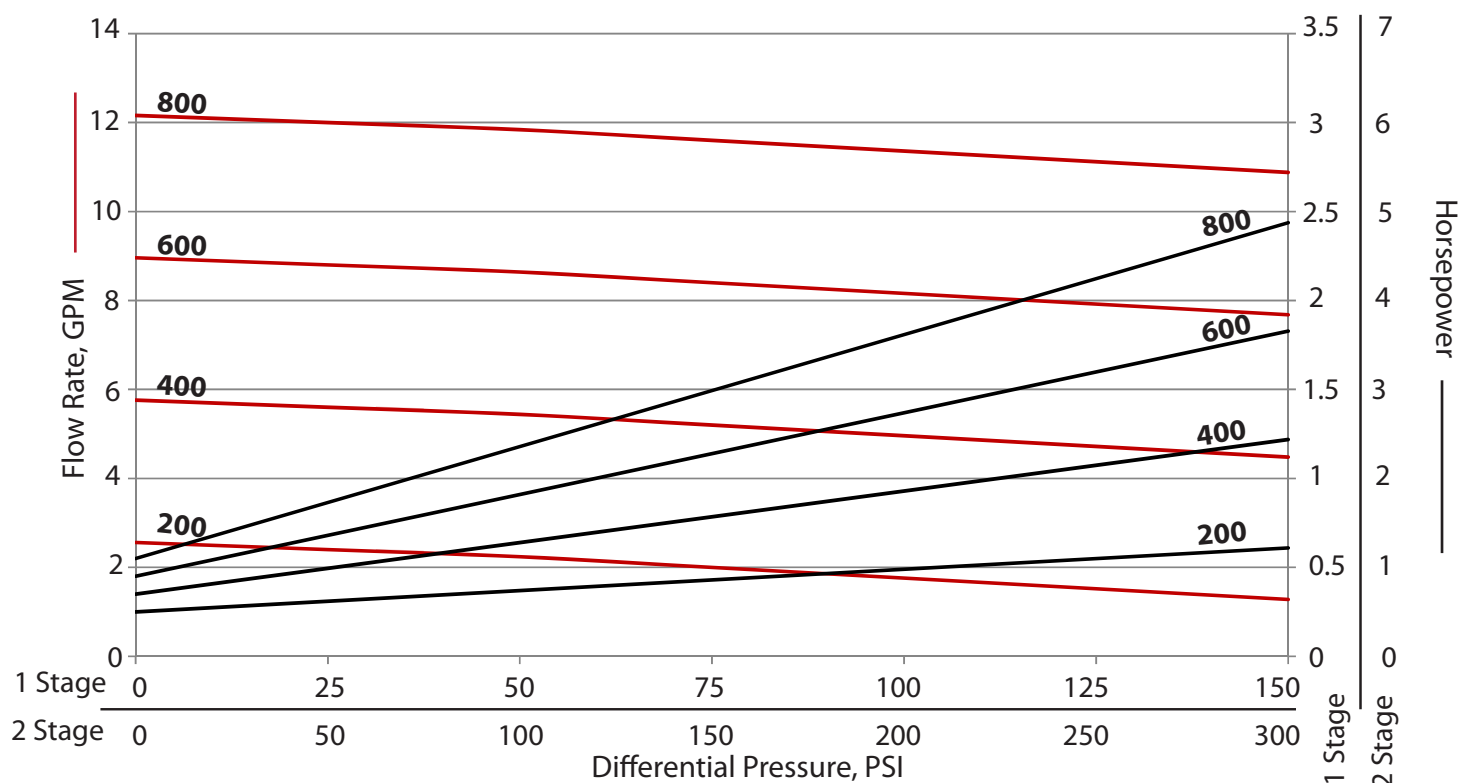

Net Positive Suction Head

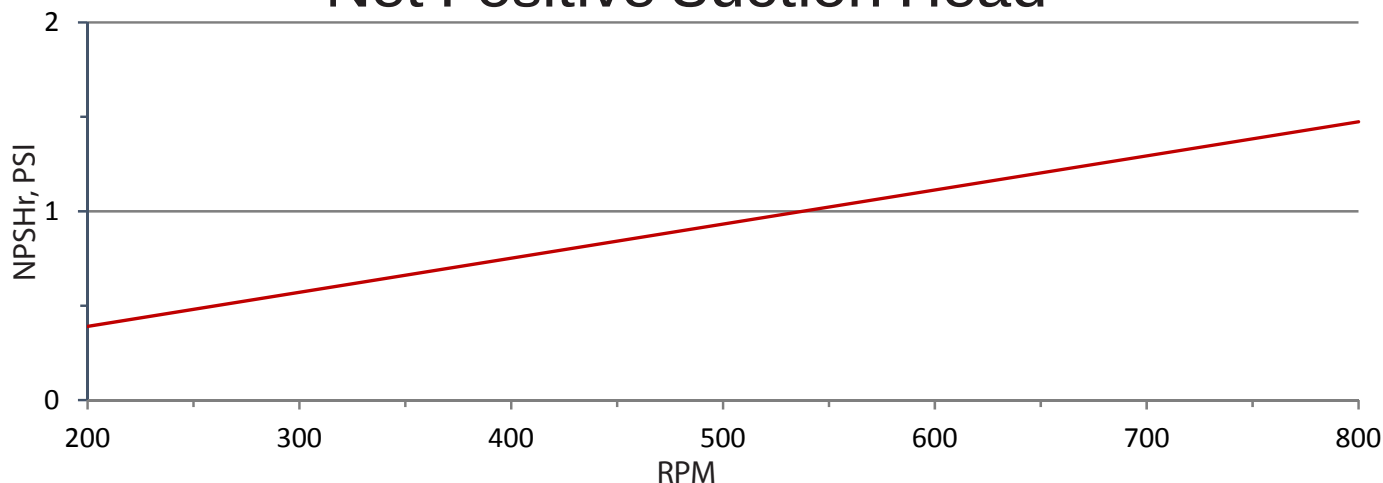

Apparent Viscosity

Torque additive (Ft/Lb) and Maximum Speed

$$\text{HP Viscosity Adder} = (\text{TQ RPM}) / 5252$$

	cPs	1000	2500	5000	10,000	50,000	100,000	150,000	200,000
1 Stage	Torque	2.3	3.4	4.8	6.5	13.5	18.5	22.5	25.7
2 Stage	Torque	4.5	6.9	9.5	13.0	27.0	37.0	45.0	51.3
	RPM	800	800	500	320	80	40	30	25

Curves are based on 70° F ISO 320 at 720 cPs