




**THE LEADING FORCE**  
behind liquids™ since 1857

# NEED MORE FLOW

OUT OF YOUR 3" PUMP?

The **3632 Liquid Transfer Pump** is designed to deliver flowrates up to 288 GPM at maximum rotation across a wide range of fluid applications and viscosities.

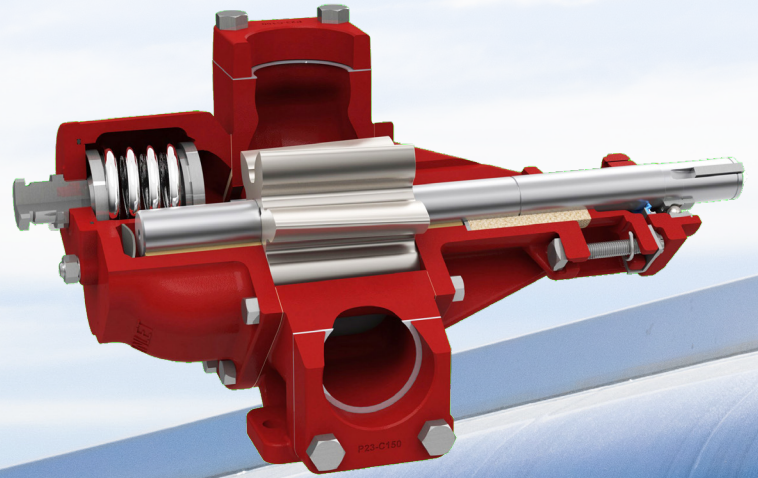

## 3632 Pumps vs. Other Pumps


- HIGHER FLOW RATE THAN TRADITIONAL TRUCK-MOUNTED 3" DESIGN
- MULTIPLE INSTALLATION ORIENTATIONS FOR EASIER INSTALL AND FLEXIBLE ROTATION
- HELICAL GEAR TECHNOLOGY FOR STRONGER TOOTH PROFILE AND QUIET OPERATION
- COMPACT, LIGHTWEIGHT DESIGN FOR EASIER MAINTENANCE AND INSTALLATION
- RATED SPEED UP TO 900 RPM

(706) 335-5551  
sales@roperpumps.com  
www.roperpumps.com

# SHORTENED BACK PLATE

## Smaller Backplate Design

- 4" Shorter and 8 lbs. Lighter
- Provides a more Compact Pump for Limited Space Installations
- Shorter Shaft allows Bearing Location closer to the Seal and Extends Seal Life




## Flexibility to use same pump configuration with PTO Shaft or Hydraulic Drives

- Triple Lip Seal Available
- Easy Seal Access for Quick Change
- Backplate Assembly Retrofits to Existing 3600 Series Pumps

# DSA PACKING


## DSA (Dry-run, Self-Adjusting) Packing is shaft packing designed to be virtually leak free.

- In tests at Roper on a unit pumping #2 fuel oil at 450 RPM and 45 PSI, the shaft packing only leaked one drop in 500 hours of operation.
- DSA packing is good for clean liquids that do not crystallize or thicken/harden when exposed to air or temperature extremes.




# SEAL OPTIONS


### PACKED BOX

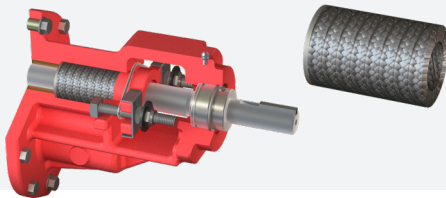


### TRIPLE LIP SEAL

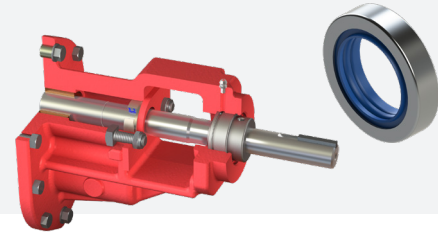


### MECHANICAL SEAL

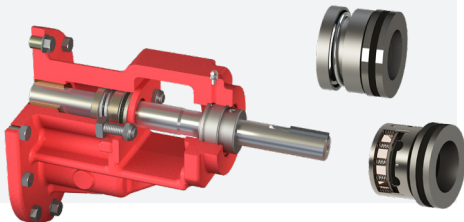

### TRIPLE LIP SEAL WITH PACKING BACKUP

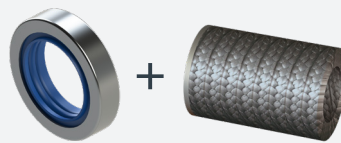

## NOMINAL FLOW RANGES

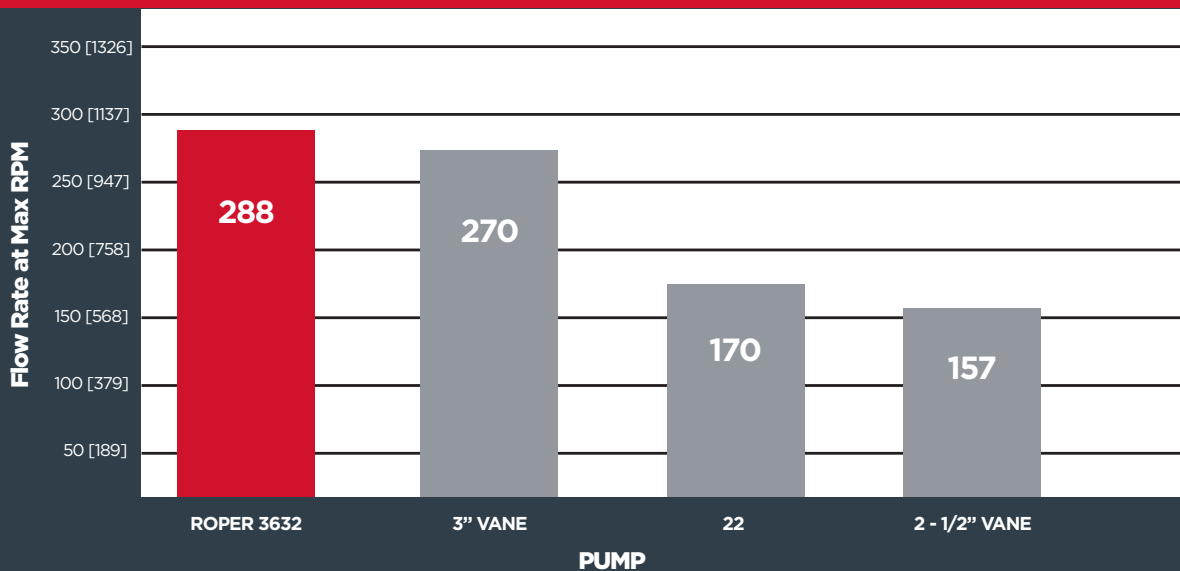

(706) 335-5551

sales@roperpumps.com  
www.roperpumps.com